


JD4-99.0KW

Standard Features

- Single bearing brushless generator
- Low 1,800 RPM operating speed
- Safety shutdown system
- 4-Point isolation mounts
- Automatic low oil pressure and high water temperature shutdown
- Freshwater heat exchange cooling
- Zinc anode in heat exchanger
- Water-cooled manifold and Stainless Steel exhaust elbow
- Direct drive seawater pump
- Air intake Cleaner / Silencer
- 12 Volt starting
- 12 Volt battery charging alternator
- Awl-Craft 2000 urethane finish
- 5-Year Limited Warranty

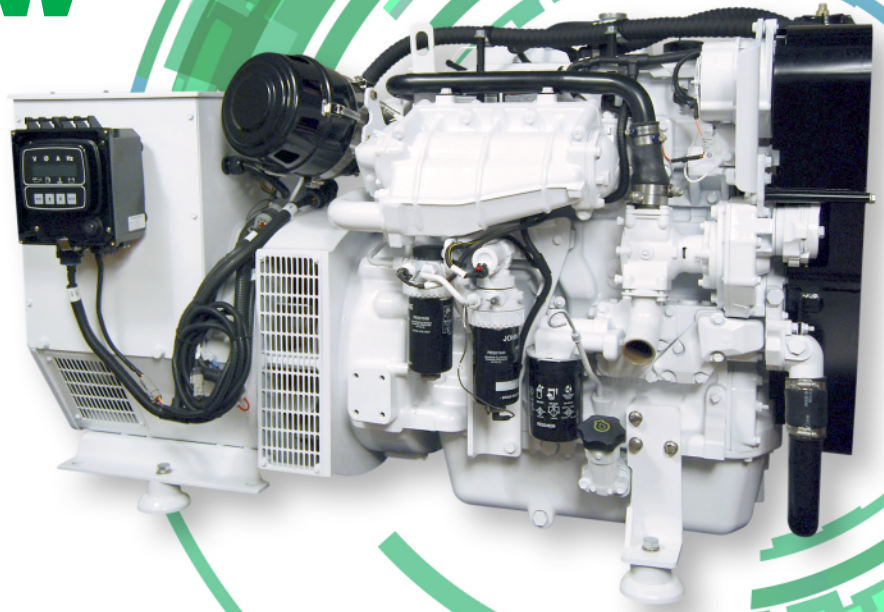

Specifications

Model	JD-99.0KW
Engine	John Deere 4045AFM85
Cylinders	4
Cu. In. Displacement	273
Bore x Stroke	4.21 x 5.00 (in.)
Dims (LxWxH)	65 x 32 x 38 (in.)
Enclosure Dims (LxWxH)	68 x 38 x 41 (in.)
Weight (lbs.)	2584
Output (volts)	208 Three phase
Output (amps)	276
Output (watts)	99,000
Fuel Consum. @ 50% load	4.3 GPH
Fuel Consum. @ 100% load	7.6 GPH
Exhaust Dia.	4.0 in.

Specifications are subject to change without notice

Optional Equipment

- Remote J-can electronic control panel with display for all engine and generator functions
- Stainless Steel drip pan
- 24 Volt starting system
- Dedicated motor starting generator windings
- Powder coated aluminum enclosure
- Remote oil filter kits
- 50 cycle output
- Custom chrome packages
- Spare parts kit
- Bow thruster FPTO



2880 Hammondville Road • Pompano Beach, FL 33069
Ph: 954-979-5899 • Fax: 954-979-4349
info@phasormarine.com • www.phasormarine.com

rev020316